

360° Rotatable Wall pack



Project info:

Project name:	Type:
Comment:	Date:

Description

Wall-mounted exterior lighting can be awfully rigid. What if you could adjust the light beam straight down to highlight landscaping—or straight up to illuminate building signage? Our rotatable wall pack gives you full control over light beam direction.

Construction

Durable die cast aluminum housing with tempered glass lens.
Fully sealed and gasketed optical compartment, wet location rated.
Enclosure and hardware are corrosion resistant.

Warranty

Ardenlux LED fixtures are covered by a five-year limited warranty.

Applications

Ideal for pedestrian walkways, building entrances, multi-use facilities, industrial facilities, perimeter parking areas, storage facilities, institutions, schools and loading docks.

Series LWPS Series, Rotatable Version

Description LED wall pack



Input Voltage	100-277VAC,
Lumen Efficacy	115-135lm/w
CCT & CRI	4000k, 5000k, 5700k, CRI>70
Viewing Angle	60° Degree
Housing	Die cast aluminum
Operating Temp.	-20°C~ 45°C
Operating Humidity	20%-90%
IP	IP65
Life span	More than 50000 hours

Order Number Logic

Example: LWPS-RT-UNV51L750

Ardenlux Model	Series	Fixture Type	Input voltage	Nominal Lumen	CRI, CCT
LWPS-RT-UNV33L7xx	LWP = LED wall pack	RT= Rotatable Wall pack	UNV= 120-277Vac	33L=3300LM @25W	740= 70CRI, 4000K
LWPS-RT-UNV51L7xx				51L=5100LM @40W	750= 70CRI, 5000K
LWPS-RT-UNV77L7xx				77L=7700LM @60W	757= 70CRI, 5700K
LWPS-RT-UNV110L7xx	S = S series			110L=10800LM @80W	

Product Size

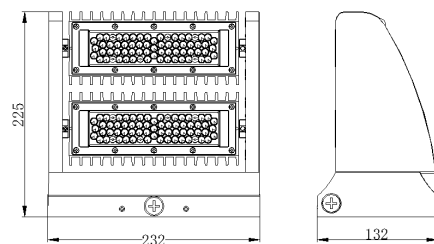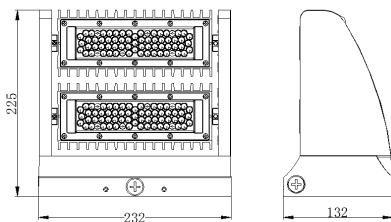

Item NO	Length	Width	Depth
LWPS-RT-UNV33L LWPS-RT-UNV51L	9.13"	5.39"	5.2"
LWPS-RT-UNV77L LWPS-RT-UNV120L	9.13"	8.86"	5.2"

